


On board railway converters

- Converter range adapted to 750V_{DC} networks
- Designed to facilitate maintenance


CHARACTERISTICS

Historization of minor and major defects	
Respect of EN standards	50 121 50 124 50 155 50 163
Protection against	Overheating Polarity reversal Water spraying Dust
Temperatures	-25°C to +50°C
Zero halogen materials	
Environnemental qualifications	

DC/DC RANGE

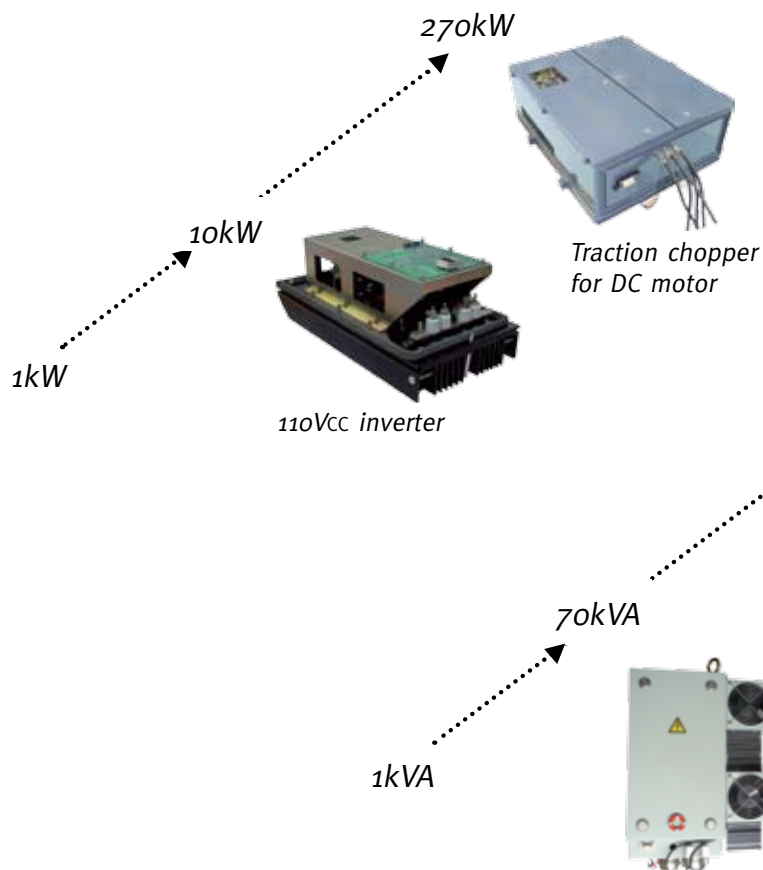

DC/AC RANGE

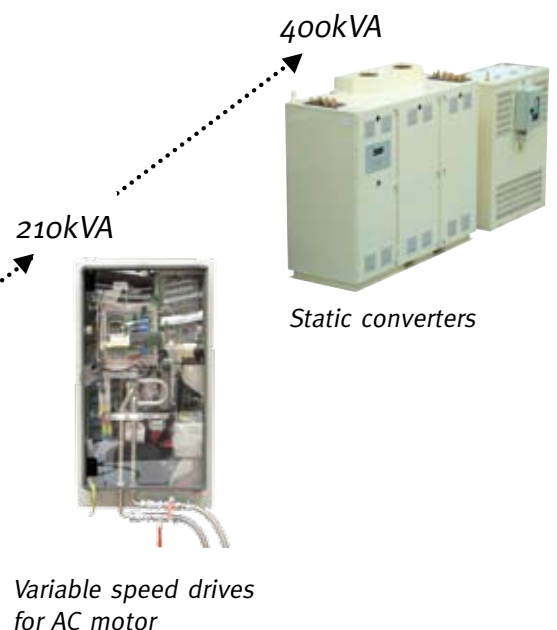

Data are given by way of illustration and are liable to be modified without notice